



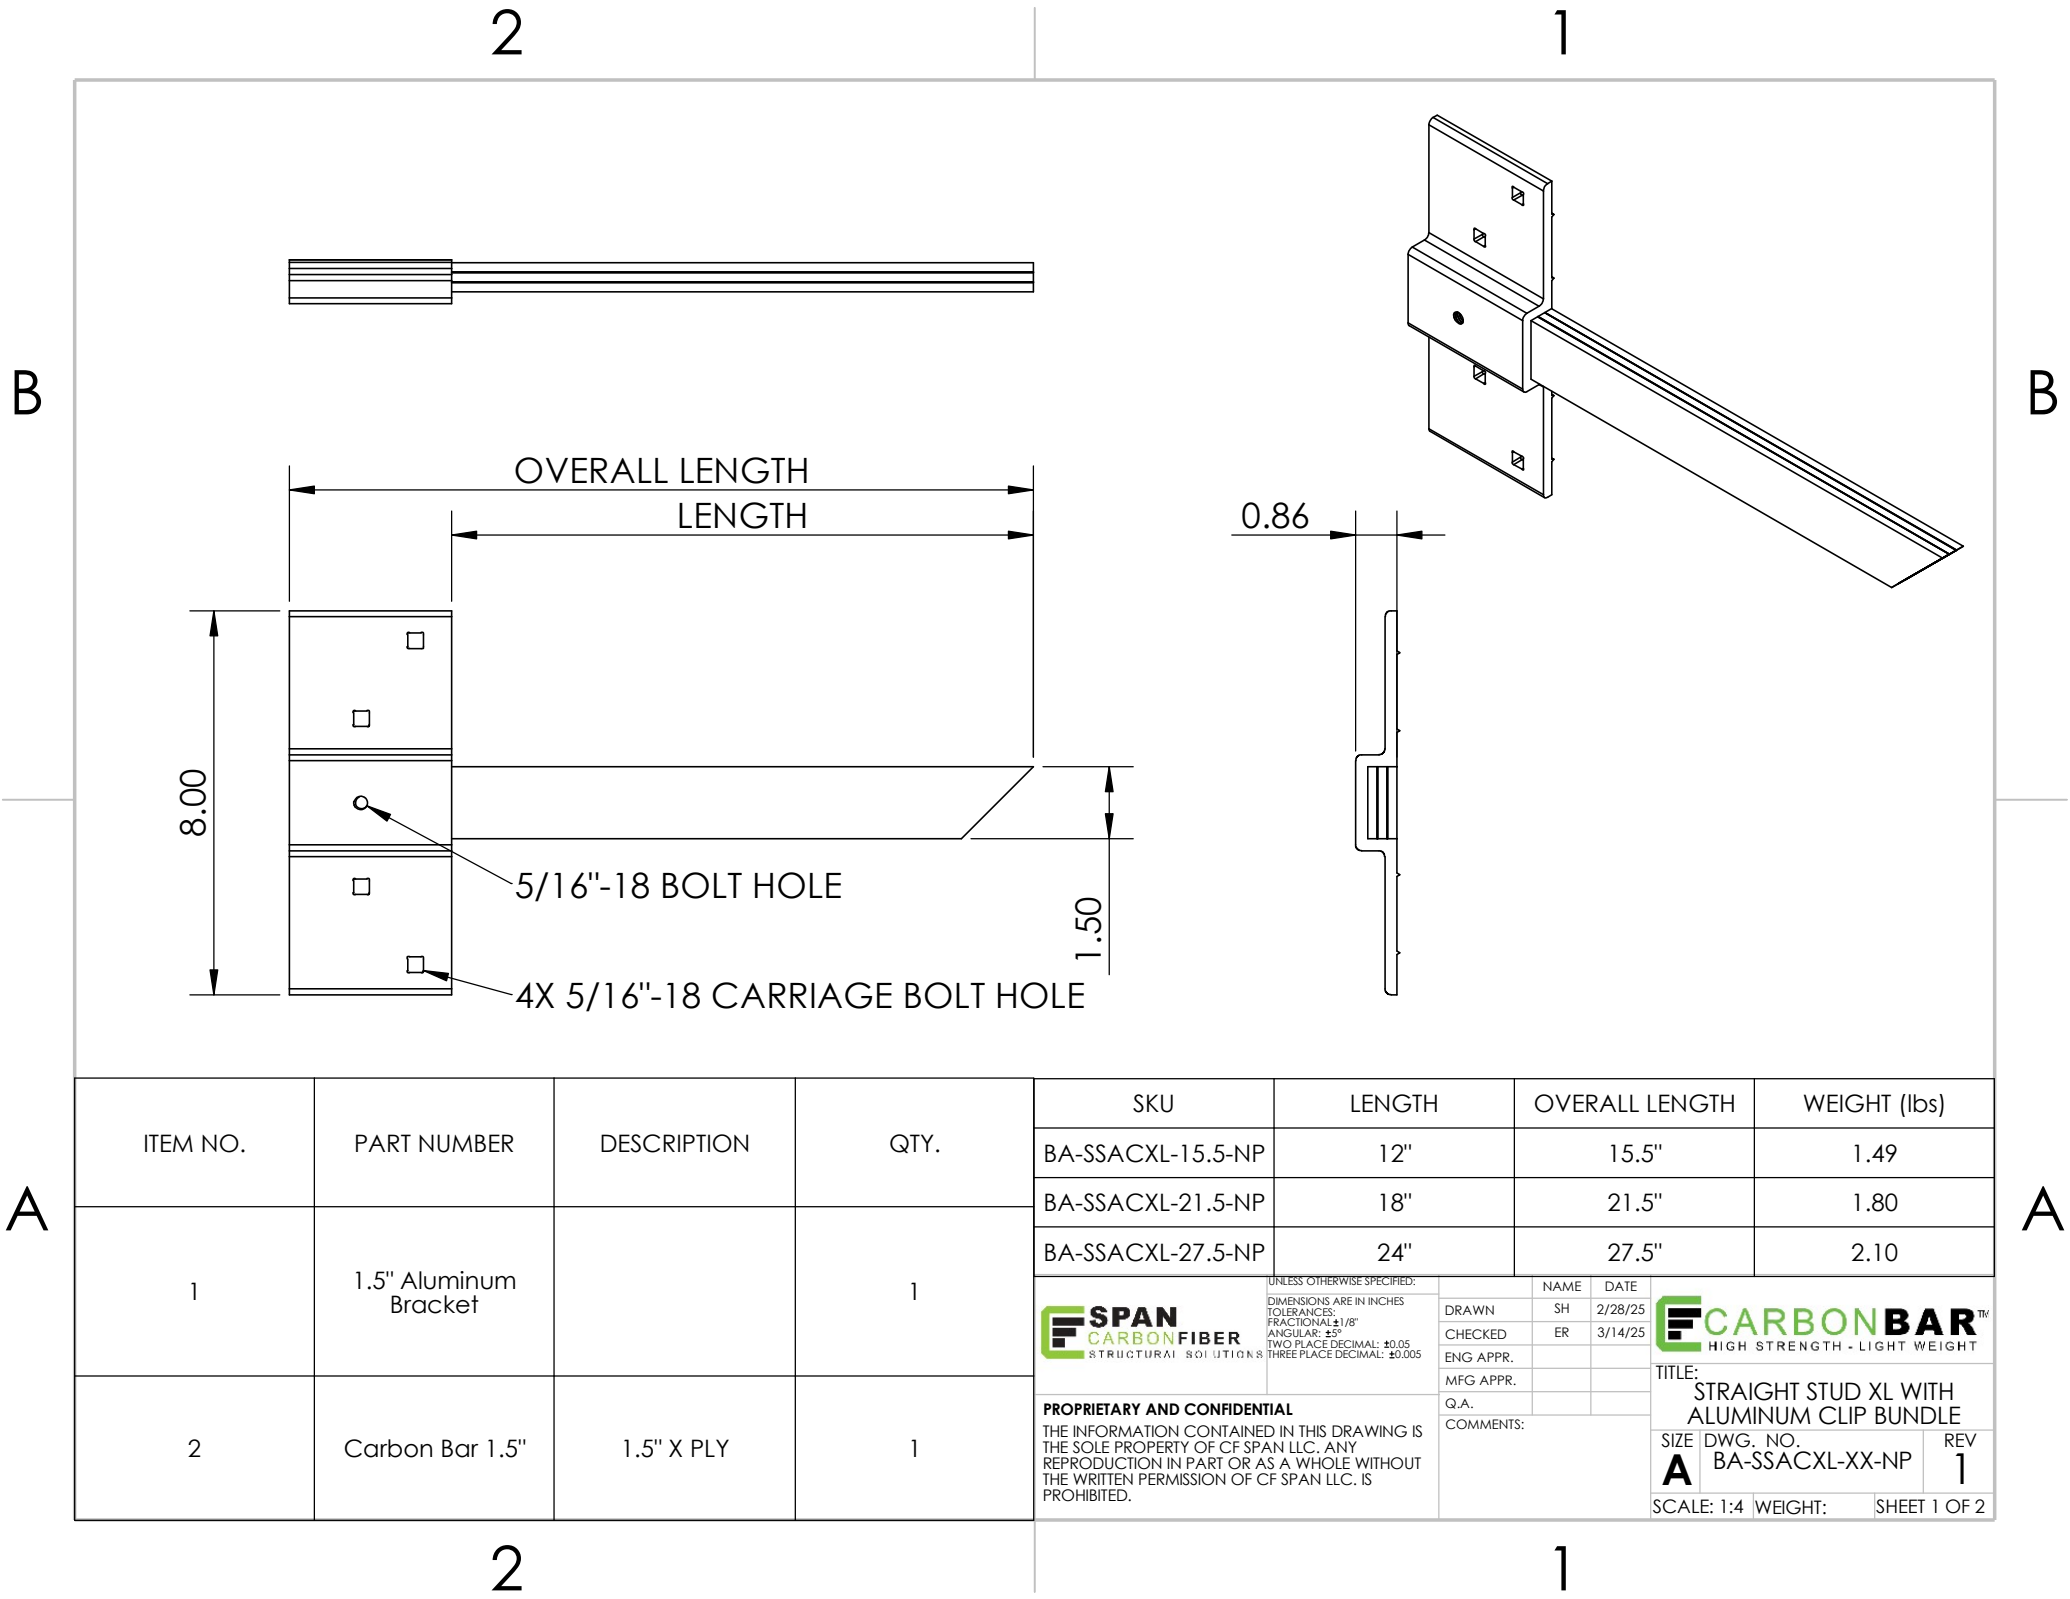

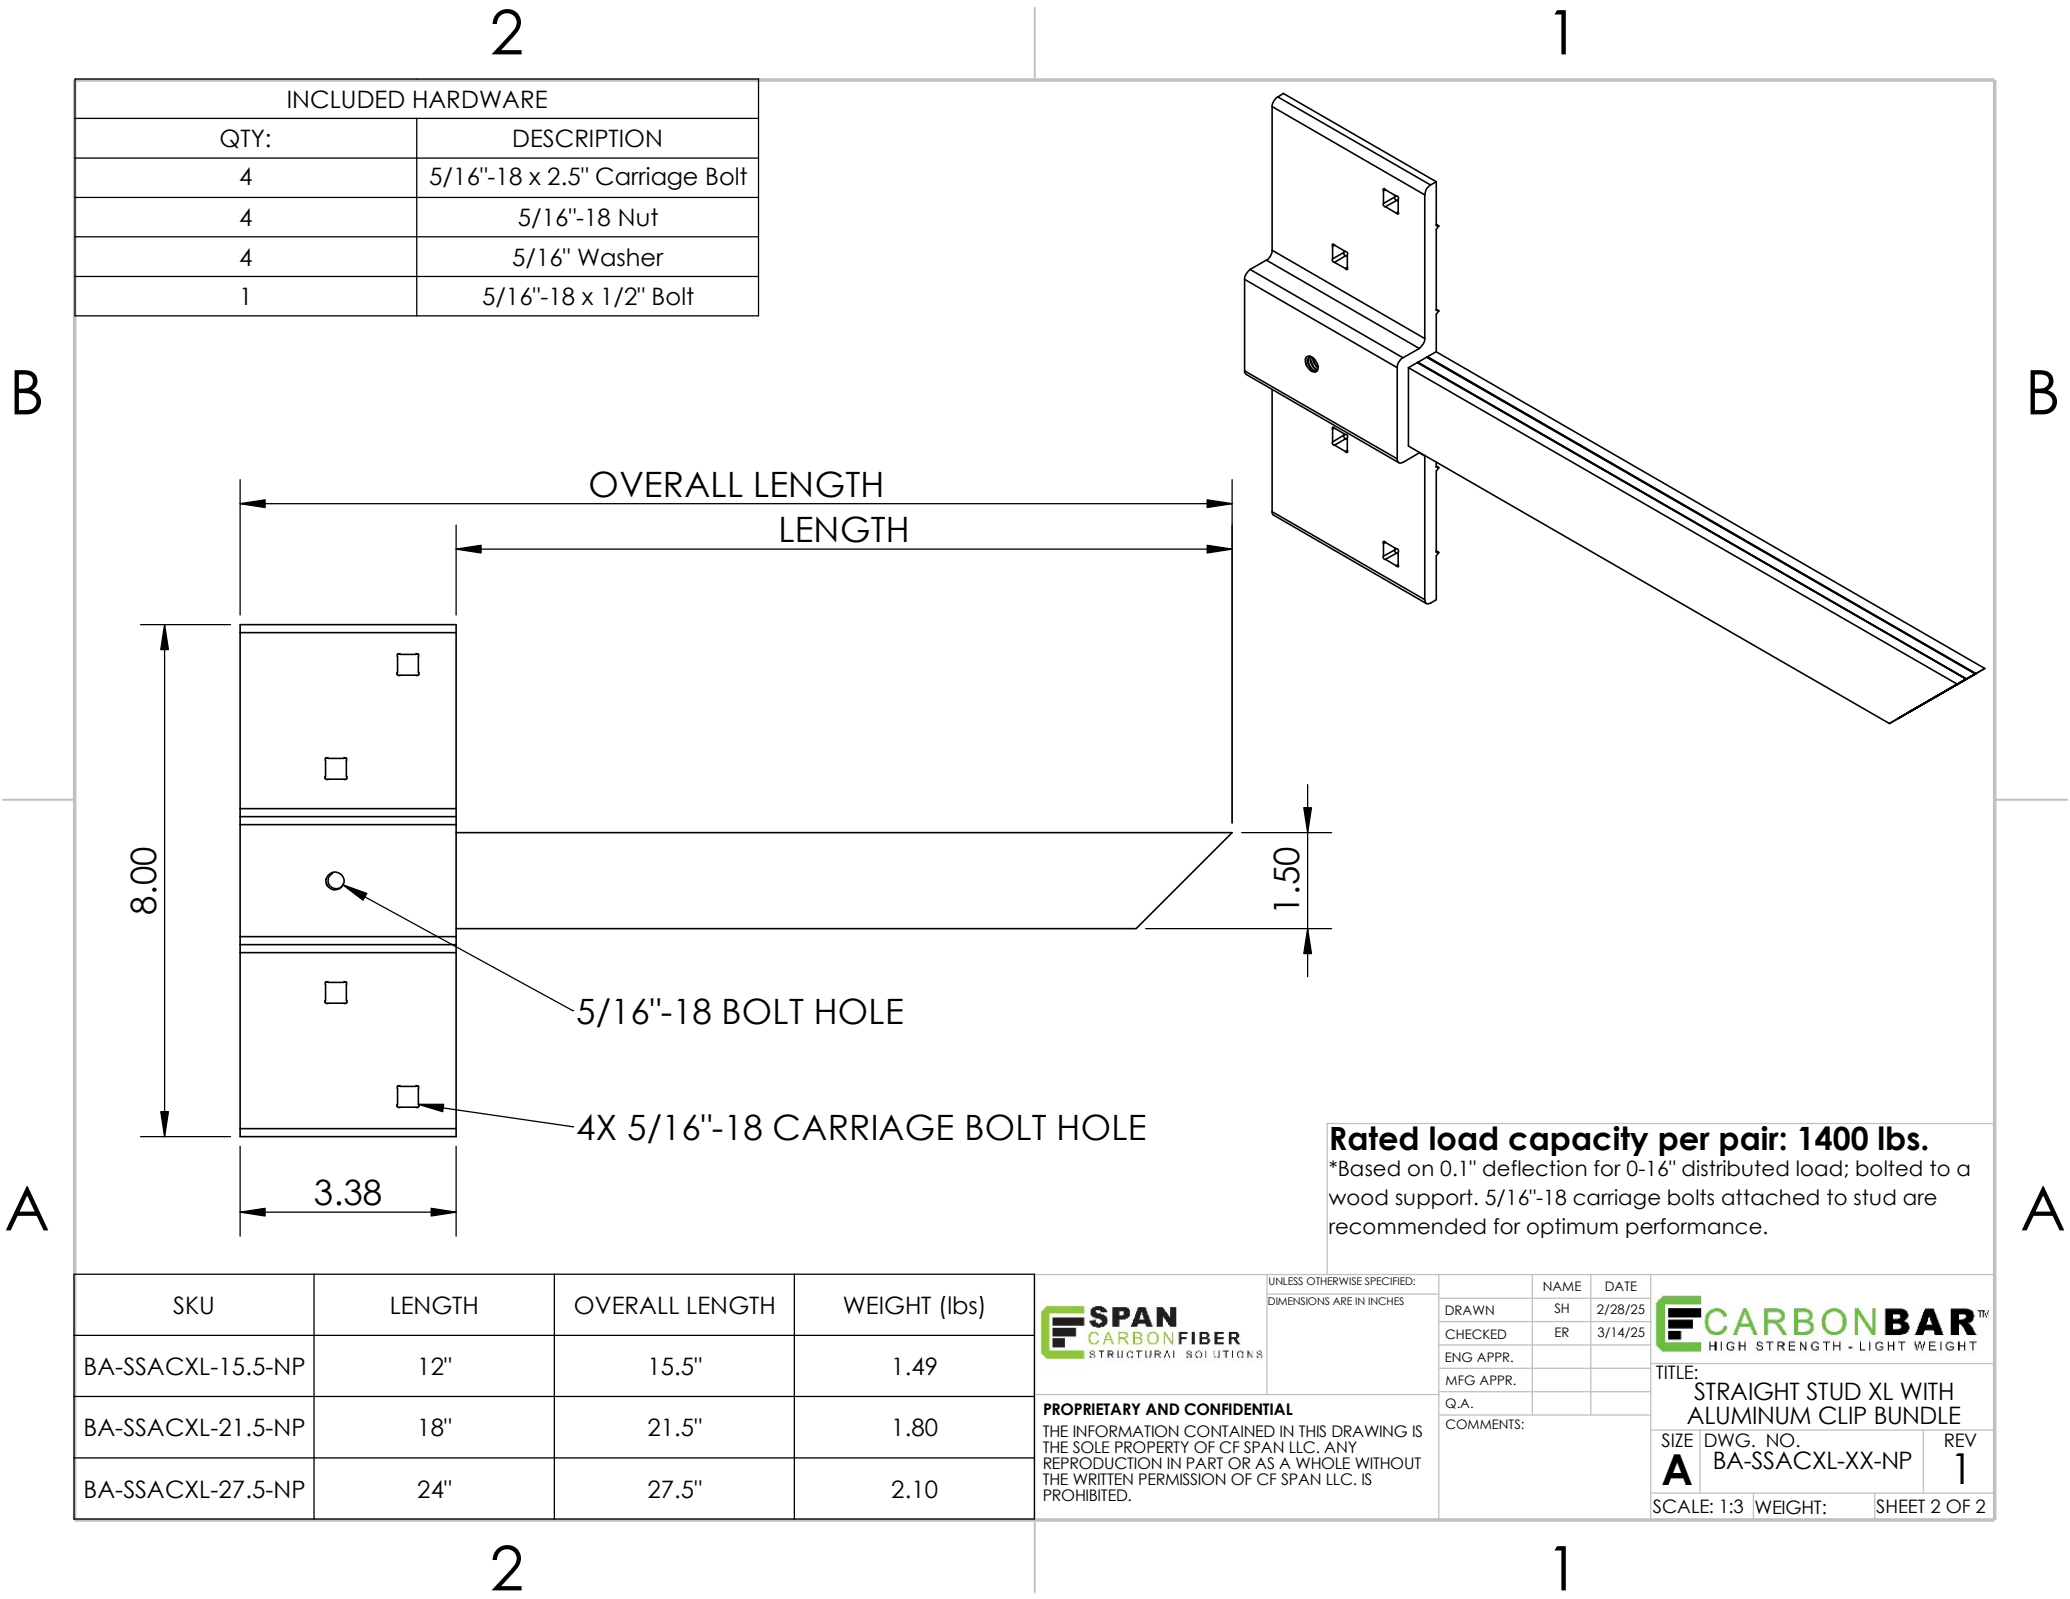

INCLUDED HARDWARE	
QTY:	DESCRIPTION
4	5/16"-18 x 2.5" Carriage Bolt
4	5/16"-18 Nut
4	5/16" Washer
1	5/16"-18 x 1/2" Bolt

Rated load capacity per pair: 1400 lbs.
*Based on 0.1" deflection for 0-16" distributed load; bolted to a wood support. 5/16"-18 carriage bolts attached to stud are recommended for optimum performance.

SKU	LENGTH	OVERALL LENGTH	WEIGHT (lbs)	SPAN CARBON FIBER STRUCTURAL SOLUTIONS UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		NAME	DATE	CARBONBAR HIGH STRENGTH - LIGHT WEIGHT TITLE: STRAIGHT STUD XL WITH ALUMINUM CLIP BUNDLE SIZE DWG. NO. REV A BA-SSACXL-XX-NP 1 SCALE: 1:3 WEIGHT: SHEET 2 OF 2
BA-SSACXL-15.5-NP	12"	15.5"	1.49		DRAWN	SH	2/28/25	
BA-SSACXL-21.5-NP	18"	21.5"	1.80		CHECKED	ER	3/14/25	
BA-SSACXL-27.5-NP	24"	27.5"	2.10		ENG APPR.			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CF SPAN LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CF SPAN LLC. IS PROHIBITED.					MFG APPR.			
					Q.A.			
					COMMENTS:			